

# SPECIFICATION SHEET: Riverbed® Steelhead® Product Family

## Model Specifications: Riverbed Steelhead xx20 Series Appliances

Steelhead Appliances are available in four different models to suit the needs of any office.

	Small Office				Mid-Size Office				Large Office or Data Center				High Availability	Management										
Model	50	100	200	300	520	1020	1520	2020	3020	3520	5520	6020	6120	Interceptor 9200	Clustered <sup>3</sup>	CMC 8000/ SMC 8500								
Profile	Desktop				1U				3U					n x 3U	1U									
WAN Capacity <sup>1</sup>	256Kbps	1 Mbps	1 Mbps	2 Mbps	1 Mbps	2 Mbps	4 Mbps	10 Mbps	20 Mbps	45 Mbps	155 Mbps	310 Mbps	310 Mbps	4 Gbps	4 Gbps	N/A								
WAN Capacity (High-speed) <sup>1</sup>	256Kbps	1 Mbps	1 Mbps	2 Mbps	1 Mbps	2 Mbps	4 Mbps	10 Mbps	20 Mbps	45 Mbps	800 Mbps	800 Mbps	800 Mbps	-	-	-								
Optimized TCP Connections <sup>2</sup>	250	25	110	165	330	700	1,100	2,000	3,500	6,000	15,000	40,000	4,000	1,000,000	1,000,000									
Total Disk	60 GB	60 GB	60 GB	60 GB	250 GB	250 GB	250 GB	500 GB	1.0 TB	1.5 TB	1.5 TB	3.2 TB	7.0 TB	n x m	n x m	250GB								
Data Store Capacity	35 GB	35 GB	35 GB	35 GB	80 GB	80 GB	80 GB	150 GB	250 GB	512 GB	700 GB	1.4 TB	3.4 TB	n x m	n x m	N/A								
RAID	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	-								
Front Swappable Disks	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	-								
RAM	512 MB				2 GB				4 GB				6 GB		8 GB		16 GB		4 GB		-		2 GB	
Slots	-	-	-	-	-	-	-	-	1				3				-	-						
Max # of Bypass Ports	2				6				16				-	-										

## Power & Physical Specifications

	Small Office				Mid-Size Office				Large Office or Data Center				High Availability	Management								
Model	50	100	200	300	520	1020	1520	2020	3020	3520	5520	6020	6120	Interceptor 9200	Clustered <sup>3</sup>	CMC 8000/ SMC 8500						
Dual Power Supplies	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-						
Triple Power Supplies	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-						
Power (Watts) <sup>4</sup>	31.5				149				425				505		425		-		206			
VA <sup>4</sup>	55				151				435				520		435		-		207			
Amps <sup>4</sup>	0.5				1.28				3.7				4.4		3.7		-		1.76			
BTU	107				508				1450				1723		1450		-		646			
Temperature	0 - 50 deg C / 32 - 122 deg F (Operating) -20 - 70 deg C / -4 - 158 deg F (Storage)				10 - 35 deg C / 50 - 95 deg F (Operating) -40 - 65 deg C / -40 - 149 deg F (Storage)				10 - 35 deg C / 50 - 95 deg F (Operating) -40 - 70 deg C / -40 - 158 deg F (Storage)				-		-		Same as Models 520 - 2020					
Relative Humidity <sup>5</sup>	20% - 80% non-condensing (Operating) 5% - 95% non-condensing (Storage)				20% - 80% non-condensing (Operating) 5% - 95% non-condensing (Storage)				20% - 80% non-condensing (Operating) 5% - 95% non-condensing (Storage)				-		-		Same as Models 520 - 2020					
System Dimensions	1.75 x 8.75 x 6 in (4.4 x 22.2 x 15.2 cm)				1.69 x 17.6 x 21.5 in (4.27 x 44.7 x 54.61 cm)				5.2 x 17.7 x 25.5 in (13.2 x 45 x 64.7 cm)				-		-		1.69 x 17.6 x 21.5 in (4.27 x 44.7 x 54.61 cm)					
Packaging Dimensions	4.75 x 12 x 13.75 in (12 x 30.5 x 35 cm)				13 x 25 x 35 in (33 x 64 x 89 cm)				13.75 x 27 x 34.5 in (35 x 69 x 88 cm)				-		-		13 x 25 x 35 in (33 x 64 x 89 cm)					
Gross Weight	7.5 lbs / 3.4 kg				26 lbs / 12 kg				89 lbs / 40 kg		92 lbs / 42 kg		95 lbs / 43 kg		105 lbs / 47 kg		89 lbs / 40 kg		-		26 lbs / 12 kg	
Rail Information	N/A				Universal (2 and 4 post) Orderable Part # CMP-RMK-DA000X. Min depth: 3 inches/8 cm (front mount). Max depth: 31 inches/78 cm				17 to 33 in (43 to 83 cm)				-		-		Universal (2 and 4 post)					

<sup>1</sup>Inbound (WAN to LAN) Steelhead capacity is unrestricted; outbound WAN capacity can be expected up to the amount listed (On the 5520, 6020, and 6120 total WAN capacity equals inbound traffic + outbound traffic)

<sup>2</sup>TCP Connections can be expected up to the amount listed

<sup>3</sup>Any Steelhead model can be clustered

<sup>4</sup>Typical power ratings @ 110V

<sup>5</sup>Operating altitude up to 10,000 feet


The availability, export, or re-export of these products or specific features are subject to the export laws and regulations of the U.S. and the laws and regulations of any applicable foreign agency or authority.

Please refer to the xx50 appliances spec sheet for specifications on the other models.

<b>System Requirements: Steelhead Mobile</b>	<b>Operating System</b>	Windows 2000 SP4, XP SP2 (32 bit versions only), Vista (32 bit versions only)
	<b>CPU</b>	Celeron 1.5 GHz
	<b>Memory</b>	512 MB
	<b>Disk Space</b>	1 GB free disk space (min. required)
	<b>Steelhead Appliance*</b>	Required
	<b>Steelhead Mobile Controller (SMC)</b>	Required
<b>Software Specifications: Steelhead Mobile</b>  Steelhead Mobile software optimizes application performance over the WAN for the mobile workforce.	<b>Concurrent Clients Supported per SMC</b>	2000
	<b>Concurrent Clients Supported with SMC Cluster*</b>	n x 2000
	<b>VPN Compatibility*</b>	Cisco, Nortel, Juniper, Microsoft, OpenVPN
	<b>Wireless PC Card Compatibility*</b>	Verizon, AT&T, Sprint

\*At least one Steelhead appliance is required running RiOS version 4.x or higher  
 \*SMCs can operate in clustered mode to support additional Steelhead Mobile clients  
 \*Partial listing. VPN compatibility may be impacted by vendor software version, client configuration, and other factors. Refer to detailed VPN specifications at [http://www.riverbed.com/steelhead\\_mobile/vpn\\_specs/](http://www.riverbed.com/steelhead_mobile/vpn_specs/) for more information  
 \*Partial listing. Wireless PC Card compatibility may be impacted dependent upon hardware and driver versions, bundled software, and other factors. Refer to detailed wireless specifications at [http://www.riverbed.com/steelhead\\_mobile/wireless](http://www.riverbed.com/steelhead_mobile/wireless) for more information

### Typical Steelhead Deployment

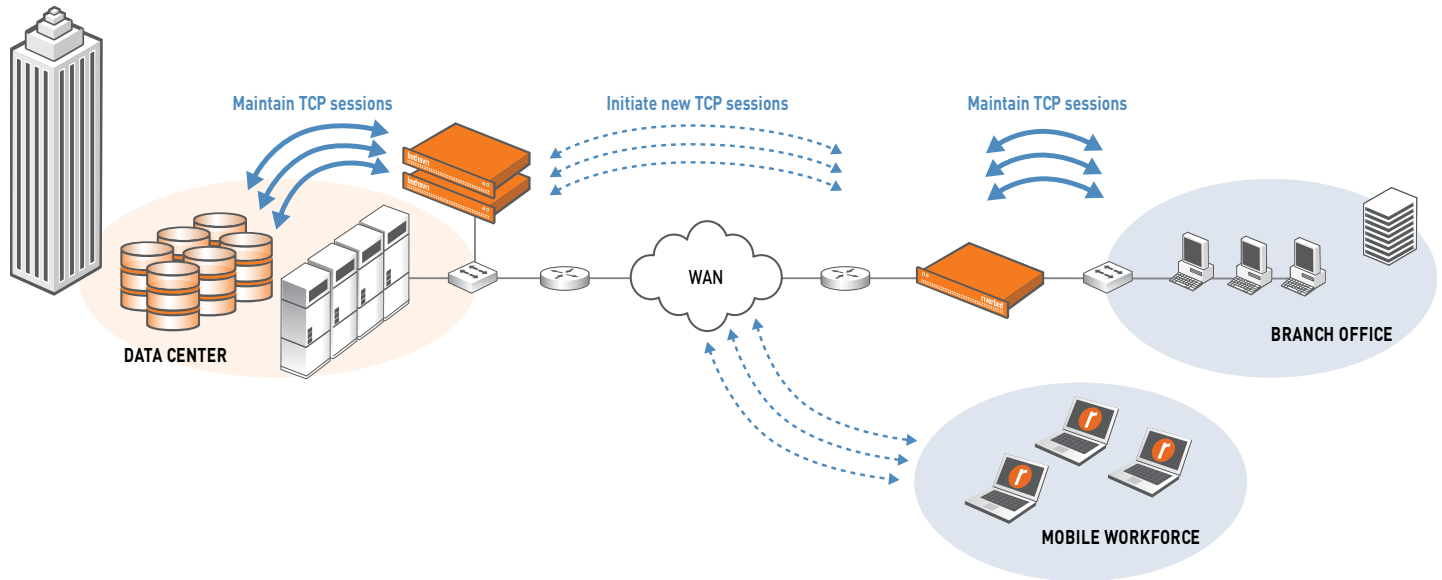

### About Riverbed

Riverbed Technology is the performance leader in wide-area data services (WDS) solutions for companies worldwide. By enabling application performance over the wide area network (WAN) that is orders of magnitude faster than what users experience ordinarily, Riverbed is changing the way people work, and enabling a distributed workforce that can collaborate as if they were local. Additional information about Riverbed (Nasdaq: RVBD) is available at [www.riverbed.com](http://www.riverbed.com).



WAN Optimization - Riverbed RiOS 3.0



**Riverbed Technology, Inc.**  
 199 Fremont Street  
 San Francisco, CA 94105  
 Tel: +1 415 247 8800  
 Fax: +1 415 247 8801  
[www.riverbed.com](http://www.riverbed.com)

**Riverbed Technology Pte. Ltd.**  
 391A Orchard Road #22-06/10  
 Ngee Ann City Tower A  
 Singapore 238873  
 Tel: +65 6508-7400

**Riverbed Technology Ltd.**  
 1, The Courtyard, Eastern Road  
 Bracknell  
 Berkshire RG12 2XB  
 United Kingdom  
 Tel: +44 1344 354 910

**Riverbed Technology K.K.**  
 Shiba-Koen Plaza Building 9F  
 3-6-9, Shiba, Minato-ku  
 Tokyo, Japan 105-0014  
 Tel: +81 3 5419 1990

© 2008 Riverbed Technology. All rights reserved. Portions of Riverbed's products are protected under Riverbed patents, as well as patents pending. Riverbed Technology, Riverbed, RiOS, Steelhead, Interceptor, and the Riverbed logo are trademarks or registered trademarks of Riverbed Technology, Inc. SP-xx20-080408